



PRODUCT CATALOG

MATERIAL & NANO TECHNOLOGY



ABOUT ALTAYF ALTHAHABI

Welcome to TTSL - Altayf Althahabi, a member of Taawon Group – Your Premier Partner in Laboratory Solutions!

At TTSL, we specialize in providing an unparalleled range of high-end laboratory solutions, consumables, and disposables. Our commitment revolves around delivering excellence, compatibility, and exceptional value and support.

Discover a world of reliable solutions tailored to elevate your laboratory experience. Diamond Spectrum is here to redefine standards and exceed expectations in the pursuit of scientific excellence.



OUR VISION

To be the leading partner in advancing laboratory and industrial technologies across the region, recognized for empowering innovation with a comprehensive range of reliable, cutting-edge systems and solutions.

OUR MISSION

Our mission is to empower our customers' success by delivering superior-quality laboratory and industrial equipment, with high customer satisfaction rate, enabling measurable improvements in their operational performance each year



TAAWON GROUP JOURNEY

Since its establishment, Taawon Group has grown from a local supplier into a trusted regional leader in laboratory and scientific equipment. Over the years, we have expanded our portfolio, forged global partnerships, and introduced pioneering technologies to the Middle East market. Today, our legacy is built on decades of expertise, innovation, and unwavering commitment to customer success.



2008

**Taawon Founded
in Jordan**



2009

**Diamond Spectrum
Founded in Saudi Arabia**



2013

**Altayf Althahabi (TTSL)
Founded in UAE**



2019

**Companies incorporated
under Taawon Group**



2021

**Diamond Spectrum
Founded in Bahrain**

ASSOCIATION & GROUP COMPANIES

Taawon
Jordan

Diamond Spectrum - DS
Saudi Arabia

Altayf Althahabi - TTSL
United Arab Emirates

Diamond Spectrum - DS
Bahrain



4000 + customers



100 + employees



4 countries



7 offices



-  Offices & operations
-  Extended operations
-  Future expansion

APPLICATIONS & INDUSTRIES

Taawon Group offers a comprehensive portfolio of laboratory, industrial, and scientific solutions designed to meet the highest industry standards and regulations in a wide variety of sectors.



Pharmaceuticals



Energy & Petrochemicals




Chemicals



Food, Beverage & Feed




Academia & Research



Nano technology



Material Testing



IVF and Life Science



Warehouse Monitoring

TABLE OF CONTENT

Laboratory Balances	1
Mettler Toledo Analytical Balances	2
Mettler Toledo Precision Balances and Scales	5
Mettler Toledo Microbalances	6
Mettler Toledo Moisture Analysis Solutions	7
Mettler Toledo Test Weights	8
Mettler Toledo Software for Laboratory Weighing	9
Analytical Instruments	11
Mettler Toledo Titration Solutions	12
Mettler Toledo Portable pH Instruments	13
Mettler Toledo Benchtop pH Instruments	14
Mettler Toledo Portable Density Measurements	15
Mettler Toledo Benchtop Density Measurements	15
Mettler Toledo UV/Vis Spectrophotometry	16
Mettler Toledo Portable Refractometer / Brix Meter	17
Mettler Toledo Benchtop Refractometer / Brix Meter	17
Mettler Toledo Melting Point Instruments	18
Mettler Toledo Dropping / Softening Point Instruments	19
Mettler Toledo Thermal Analysis Excellence	20
Mettler Toledo Laboratory Software Solutions	22
C-Therm Thermal Conductivity	23
Liquid Handling Solutions	25
Mettler Toledo Pipettes	26
Mettler Toledo Pipette Tips	27
Mettler Toledo Semi-Automated Pipetting Systems	28
Mettler Toledo Pipette Management	29

TABLE OF CONTENT

Electron & X-ray Microscopy Solutions	30
Tescan Scanning Electron Microscopes (SEM)	31
Tescan Focused Ion Beam-Scanning Electron Microscopes (FIB-SEM)	33
Tescan Micro-computed tomography (microCT)	34
Tescan Micro-computed tomography (microCT)	35
Metallography Preparation	36
Buehler Sectioning & Cutting	37
Buehler Mounting	38
Buehler Grinding & Polishing	39
Buehler Etching	40
Buehler Hardness Testing	41
Materials Testing Systems	43
Instron Universal Testing Systems	44
Instron Dynamic Testing Systems	46
Instron Rheology and Impact Testing Systems	48
Materials Testing Instruments	49
Rtec Mechanical Testing Solutions	50



METTLER TOLEDO

Laboratory Balances

Laboratory Balances

Analytical Balances

XPR Balances

- The XPR series spans from ultra-micro to high-capacity precision, covering capacities from as low as a few grams up to 64 kg.
- Micro-analytical models feature readabilities down to 0.0001 mg with typical repeatability of 0.00015 mg at 5 % load.
- Analytical models (e.g. XPR106DUH, XPR205) achieve readabilities of 0.005 mg to 0.01 mg with minimum weights ($k=2$, $U=1\%$) starting from ~0.6 mg.
- Integrated quality assurance functions like GWP Approved, StatusLight, and LevelControl actively monitor weighing conditions and enforce process tolerances.
- StaticDetect detects electrostatic charge on sample or container and issues warnings, and can be paired with ionizing modules to eliminate static effects.



XPR Essential Balances

- XPR Essential balances offer connectivity via Ethernet, 3 × USB-A, and USB-B ports for flexible data handling.
- The analytical models include a 7-inch color touchscreen (glove-compatible) for intuitive control and input.
- They feature motorized draft-shield doors that open with one touch to streamline sample access.
- Built-in quality assurance includes StatusLight, LevelControl, and MinWeigh warning to enforce process boundaries.
- Analytical versions use a hanging weighing pan with high-performance load cell for precise weighing of small samples.



Laboratory Balances

Analytical Balances

MX Balances

- MX balances feature the SmartPan weighing pan that reduces air-draft effects and accelerates stabilization.
- They include FACT (Fully Automatic Calibration Technology) for internal self-adjustment to maintain accuracy over environmental changes.
- MX models offer connectivity via USB, Ethernet, and optional Bluetooth for data transfer and system integration.
- Quality assurance tools such as StatusLight, routine test guidance, and user management support compliance workflows.
- Precision variants can deliver readabilities down to 0.01 mg, making them suitable for demanding analytical applications.



MR Balances

- MA balances cover a weighing range from 50 g up to 5 kg with readabilities as fine as 0.00001 g
- They employ a MonoBloc™ load cell and internal automatic weight adjustment for sustained high precision
- Touch control interface with guided menus and automatic calculations streamline routine weighing tasks
- Strong metal base and durable outer housing provide chemical resistance and ease of cleaning
- Communication options include USB-A and RS232, along with passcode protection to guard settings against unauthorized changes



Laboratory Balances

Analytical Balances

MA Balances

- MA balances support capacities from 50 g up to 5 kg with readabilities as fine as 0.00001 g
- They employ a MonoBloc™ weighing cell for reliable measurement stability
- The user interface offers built-in applications and automatic calculations to streamline weighing workflows
- The housing is constructed with a strong metal base and chemical-resistant outer shell to withstand harsh lab conditions
- Communication is enabled via USB-A and RS232 interfaces, with password protection to secure configuration settings



LA Balances

- LA balances provide readabilities down to 0.0001 g with capacities from 80 g to 4 kg
- They use a precise electromagnetic force compensation (EMFC) load cell for fast and stable weighing
- Built-in functions include dynamic weighing and piece counting to simplify common workflows
- The balances offer RS232 communication for printer, secondary display, or PC interface
- They incorporate metal base construction, overload protection, and setting locks to ensure durability and process integrity



Laboratory Balances

Precision Balances and Scales


- Precision balances support capacities from 120 g up to 64 kg and readabilities between 1 g and 0.1 mg
- Lower-readability models incorporate draft shields while high-capacity models use large weighing pans to accommodate bulk loads
- The SmartPan / SmartPan Pro weighing pan reduces air-draft influence, doubling speed and improving repeatability
- Connectivity options include RS232, USB, and LAN interfaces, with optional Bluetooth/WLAN support
- Construction features include metal housings, overload protection, smooth surfaces, and rounded edges for durability and ease of cleaning
- Many models offer built-in weighing applications (e.g. formulation, dynamic weighing, piece counting) to streamline processes
- Precision balances may include LevelControl which issues warnings when the balance is not properly leveled
- The MinWeigh function ensures sample weights below the minimum accuracy threshold are flagged (displayed in red) and not released
- Some balances support glove mode for operation while wearing disposable or reuseable gloves
- Capacities above 10 kg are supported by large platform models with 0-3 decimal place readability suitable for heavy and bulky items



Laboratory Balances

Microbalances

- Capacity up to 52 g with readability down to 0.1 µg, enabling measurement of samples as low as 30 µg
- High-performance weighing cells with exceptional repeatability and low minimum weight capability
- Built-in quality assurance via Tolerance Profiles and audit-proof monitoring of weighing status
- SmartView terminal design allows separation of the display from the weighing chamber for ergonomic placement
- Draft shield is cylindrical with all-round visibility and automatic (touchless) door operation
- Compact footprint minimizes space usage and supports installation in confined environments
- Intuitive touchscreen interface with guided method library and easy operation for repetitive tasks
- Internal results notepad automatically records all measurement parameters and results
- Easy removal and cleaning of draft shield components and weighing pan without tools
- Optional electrostatic ionizer modules and StaticDetect support detection and mitigation of sample charging

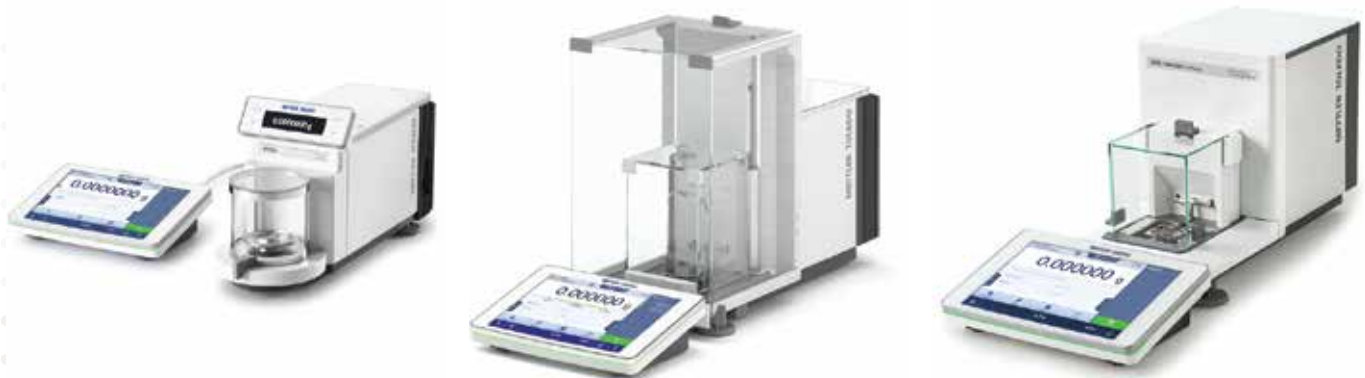

Laboratory Balances

Moisture Analysis Solutions

- Moisture analyzers use the loss on drying (thermogravimetric) method, combining a balance and halogen heating unit for moisture measurement.
- These analyzers deliver rapid and precise moisture content determination through advanced weighing technology and precise temperature control.
- The QuickPredict feature enables prediction of final results early, reducing measurement time for certain models.
- Connectivity is enabled via USB, Ethernet, and RS232 interfaces, supporting data transfer and integration into lab systems.
- Routine checks are simplified via SmartCal, a quick 10-minute performance test to verify overall instrument function.
- The Method Wizard assists in creating custom drying methods directly on the instrument for reproducible protocols.
- Multiple instruments (up to five) can be managed via EasyDirect™ Moisture PC software, centralizing data for visualization and storage.
- ID management supports sample tracking via barcode reader integration for some analyzer models.
- Robust construction with durable housing allows operation even under harsher industrial or laboratory conditions.
- User management and auto-lock features enforce method control and compliance in user workflows.



Laboratory Balances

Test Weights

- Test weights from 50 µg up to 5 tons cover the full calibration range for balances and scales
- Supplied in OIML and ASTM classes to meet different levels of metrological accuracy
- Available as single weights, weight sets, reference weights, and microgram weights for various application
- Manufactured from stainless steel (austenitic) with corrosion resistance for long-term stability
- Knob weights, wire weights, and sheet weights are offered for fine and micro ranges, some with adjusting cavities
- Weights come with or without calibration certificates, supporting traceability where required
- Heavy-capacity and crane weights include stackable cast iron or stainless steel designs for ton-scale calibration
- Weight sets range from 1 mg up to 5 kg (or more) in various combinations to support stepwise calibration
- Accessories such as tweezers, forks, gloves, and cleaning cloths are provided for proper handling and maintenance
- METTLER TOLEDO's GWP® Recommendation service helps select the correct weight class and value for routine verification tasks



Laboratory Balances

Software for Laboratory Weighing



Laboratory Balances

Software for Laboratory Weighing

LabX Balance Software

- LabX Balance enables centralized control of instruments, tasks, and users across a network
- SOP guidance is displayed directly on the balance terminal to enforce correct procedures
- Automatic data transfer eliminates manual transcription by sending results directly into the LabX database
- Users can define differential weighing sequences and templates to match regulatory and process requirements
- LabX supports audit-proof user management, electronic signatures, and traceable workflows



EasyDirect Balance Software

- Collects weighing data from up to 10 balances via RS232 or Ethernet.
- Records results automatically in the background for continuous logging.
- Exports data in CSV, XLSX, XML, or PDF formats.
- Provides control charts and statistical analysis for trend monitoring.
- Includes access protection to secure results and instrument settings.



Moisture Analyzer Software

- Connects up to 5 moisture analyzers in one database.
- Transfers data via USB, Ethernet, RS232.
- Supports OneClick method launch with user guidance.
- QuickPredict speeds up moisture results.
- Enables sample ID tracking with barcode support.





METTLER TOLEDO

Analytical Instruments

Analytical Instruments

Titration Solutions

Titration Systems

- Control the addition of titrant to determine analyte concentrations by tracking reaction endpoints with high precision
- Modular platforms allow integration with autosamplers, multiple burettes, and sensors to broaden application capabilities



Karl Fischer Titrators

- Specifically designed to measure water content in solids, liquids, and gases using volumetric or coulometric techniques
- Support water determinations from low ppm levels up to 100 % content in samples



High-throughput Titration Systems

- Include carousel autosamplers (e.g. Rondolino) to automate sample throughput for general titration tasks
- Reduce manual intervention and increase consistency across titration processes



Titration Sensors

- Robust electrodes and probes optimized for pH, redox, ion-selective, or conductivity titration endpoints
- Designed for durability and accuracy in diverse sample matrices, ensuring precise endpoint detection



Analytical Instruments

Portable pH Instruments

Seven2Go

- Offers portable measurement of pH, conductivity, dissolved oxygen, and ion concentration in one handheld unit.
- Designed with waterproof/dustproof protection (IP67) and supports storage of up to 200 measurements.
- Features temperature measurement capability with resolution 0.1 °C across range –5 °C to 105 °C.



SevenGo Duo

- Multiparameter, handheld meter supporting pH, conductivity, ion concentration, and dissolved oxygen in one instrument.
- Operates in dual-channel mode, enabling simultaneous measurement of two parameters or samples.
- Engineered for routine field and lab use with ruggedness and ease of operation in varied conditions.



FiveGo

- Portable field meter engineered to measure pH, conductivity, ORP, and dissolved oxygen for water, soil, and food samples.
- Built with IP67 waterproof/dustproof rating and an intuitive menu for quick measurement workflows.
- Offers pH measurement resolution of 0.01 and accuracy of ± 0.01 across the full 0–14 pH range.



Analytical Instruments

Benchtop pH Instruments

SevenDirect

- Benchtop meter that measures pH, ion concentration, and conductivity with built-in GLP support.
- Designed for intuitive operation, featuring automatic sensor recognition and calibration reminders.
- Some models (e.g. SD20) include ORP measurement capability and use a sensor arm (EasyPlace) for consistent probe positioning.



SevenExcellence

- Multi-channel benchtop pH system supporting measurements of pH, conductivity, dissolved oxygen, redox, and ion concentration.
- Enables precise, simultaneous measurements with modular sensor inputs.
- Provides high flexibility for complex analytical workflows through parameter expandability.



NineFocus

- Modular multiparameter benchtop system allowing up to four electrochemical measurements (e.g. pH, redox, conductivity, DO) in one unit.
- Designed to handle ultra-low volume samples with high precision.



FiveEasy

- Benchtop meter engineered for pH/mV or conductivity measurements in routine analytical tasks.
- Compact design intended to provide reliable, accurate performance in a simple and economical format.
- Suitable for laboratories needing straightforward, robust pH or conductivity testing without additional functionalities.



Analytical Instruments

Portable Density Measurements

- Portable density meters use the oscillation tube (U-tube) method to measure liquid density accurately.
- They support derived parameters such as specific gravity, Brix, and concentration, converting density into meaningful units.
- Built-in temperature compensation ensures accurate readings despite sample temperature variation.
- Many models are handheld or pocket-sized, enabling measurement in the lab or field.
- Results precision is high, with three-digit resolution in density measurements.
- They can store hundreds of measurement records, enabling data logging and traceability.
- Bright, backlit displays and intuitive menus aid readability and usability in varied lighting.



Analytical Instruments

Benchtop Density Measurements

- Benchtop density meters use oscillation tube (U-tube) technology to determine liquid density and related metrics.
- They support derived scales such as specific gravity, concentration, and Brix based on the measured density.
- Automatic temperature control (or temperature compensation) is integrated to maintain measurement accuracy across varying thermal conditions.
- These instruments interface with LabX software for workflow control, data storage, and regulatory compliance.
- The "Excellence" line of benchtop density meters is positioned as an all-rounder solution for many sample types with high accuracy.
- Firmware and software features support data handling, method management, and result export in lab environments.
- These meters are engineered for stable operation in laboratory conditions, maintaining repeatability and precision across replicates.



Analytical Instruments

UV/Vis Spectrophotometry

EasyPlus UV/VIS

- Dual-beam optical design with reference detector ensures stable baseline and accurate measurements.
- Uses exchangeable XPathHolder™ cuvette carousels covering multiple path lengths, with PathDetect™ to verify selected path.
- Offers 3-in-1 functionality: spectrophotometry, color measurement (30 built-in color scales), and water analysis.
- Equipped with a xenon flash lamp (in "UV" version) for broadband UV/Vis coverage and long lamp life.
- Wavelength range spans 190 nm to 1,000 nm (for UV model), with wavelength accuracy of ± 1.5 nm and resolution ≤ 0.5 nm.
- SmartLid™ enables automatic start of measurement upon closing, streamlining routine workflows.



UV/VIS Excellence

- Wavelength range from 190 to 1,100 nm, giving broad UV/VIS coverage
- Resolution better than 1.5 (toluene in hexane) with wavelength accuracy ± 1.0 nm and repeatability < 0.15 nm
- Compact size ($\approx 208 \times 255 \times 228$ mm) and weight (~ 6.4 kg) suitable for benchtop use
- Employs FastTrack™ technology (xenon flash lamp and CCD array) for full spectrum scans in about 1 second
- No moving optical parts, enhancing mechanical stability and reducing maintenance
- Complies with pharmacopeia spec (e.g. stray light, photometric accuracy) for regulated environments



Analytical Instruments

Portable Refractometer / Brix Meter

- Measures refractive index and Brix (% w/w) with high resolution and repeatability in field or lab settings.
- Automatic temperature compensation is built in to correct readings based on sample temperature.
- Has a compact, handheld design optimized for portability and ease of use in on-site or at-line measurements.
- Offers predefined calibrations and user methods, allowing quick switch between measurement scales.
- Equipped with data logging memory, capable of storing multiple readings for later review or transfer.
- Supports digital interface connectivity (e.g. USB or similar) for exporting data to PCs or lab systems.



Analytical Instruments

Benchtop Refractometer / Brix Meter

- Uses oscillation-tube (U-tube) technology to determine refractive index and related concentration values.
- Supports derived scales such as Brix, specific gravity, and concentration conversions based on refractive index.
- Offers automatic temperature compensation to correct measurements across varying sample temperatures.
- Designed to provide fast refractive index readings in routine laboratory workflows.
- Compact, space-saving benchtop form factor optimized for routine lab use.
- Integrated software and user interface facilitate method setup, data handling, and repeatable measurement procedures.



Analytical Instruments

Melting Point Instruments

Melting Point

- The MP80 system automatically measures melting, boiling, cloud point, and slip melting point in a single instrument.
- It supports simultaneous measurement of multiple samples (e.g. up to six) to increase throughput.
- The maximum operating temperature of the MP90/MP80 class reaches 400 °C, enabling analysis of high-melting compounds.



Slip Melting Point

- Slip melting point (SMP) refers to the temperature at which a solid (e.g. fat or wax) rises in a tube when the outer surface melts under hydrostatic force.
- The instruments on the METTLER TOLEDO melting point product line support automated slip melting point determination alongside melting, boiling, and cloud point measurements.



Boiling Point

- The MP80 / Excellence systems support automatic boiling point determination as part of their multi-point thermal analysis capability (melting, boiling, cloud, slip).
- Boiling point is measured under controlled heating ramps and detection algorithms to identify the transition temperature consistent with pharmacopeial methods.
- These instruments run parallel measurements on multiple samples, enabling simultaneous boiling point analysis along with other thermal points.



Cloud Point

- Cloud point is one of the thermal transition parameters that the MP80/Excellence melting point systems can measure, along with melting, boiling, and slip melting points.
- In cloud point determination, the instrument monitors light transmittance or turbidity changes as the sample is heated to detect the onset of phase separation.



Analytical Instruments

Dropping / Softening Point Instruments

Melting Point

- Modern systems support fully automated dropping point and softening point tests on one instrument, handling multiple samples without manual intervention.
- The DP70 model can evaluate two samples simultaneously up to a maximum temperature of 400 °C.
- The DP90 variant operates across a broader range (-20 °C to 400 °C), enabling both sub-ambient and high-temperature dropping or softening analyses.
- These instruments use video imaging and digital image analysis to detect the first drop or flow front during heating, providing automation and precision.
- The systems comply with recognized standards such as IP 396 (for grease dropping point tests)
- Performance is optimized for both dropping and softening point determination, giving more flexibility in thermal characterization of substances.



Slip Melting Point

- Softening point determination is integrated with dropping point analysis in the same instrument, allowing simultaneous measurement of both transitions.
- Instruments like the DP70/DP90 can measure softening point over a temperature range up to 400 °C (or down to -20 °C in DP90) for high-temperature materials.
- The softening point is detected by video imaging and digital image analysis, observing the first sign of sample deformation or flow under heating.
- Softening point analysis follows recognized test standards, ensuring compliance with industry thermal testing methods.
- Some systems support parallel analysis of two samples, so softening point can be measured for two specimens simultaneously under identical conditions.



Analytical Instruments

Thermal Analysis Excellence

Differential Scanning Calorimetry (DSC)

- METTLER TOLEDO's thermal analysis line includes DSC systems as one of its core techniques, alongside TGA, TMA, and DMA.
- Their DSC offerings span variants like standard DSC, high-pressure DSC, and ultra-fast (chip) DSC, enabling analysis of materials under different pressures and fast thermal cycles.



Dynamic Mechanical Analysis (DMA)

- DMA characterizes viscoelastic and mechanical properties of materials under oscillatory stress, capturing modulus and damping behavior.
- METTLER TOLEDO's DMA systems offer a wide frequency range (0.001 to 1000 Hz) and support simultaneous thermal measurement (SDTA) for combined analysis.



Hot Stage Microscopy

- Hot-stage microscopy enables visual observation of thermal transitions (e.g. melting, crystallization) while the sample is heated or cooled.
- The HS84 system combines microscopy with simultaneous DSC heat flow measurement, providing complementary thermal and visual data.



Thermogravimetry (TGA)

- Thermogravimetric Analysis (TGA) tracks mass change (loss or gain) of a sample as it experiences controlled temperature, time, and atmosphere variations.
- METTLER TOLEDO's TGA instruments include advanced models such as TGA/DSC 3+ that provide exceptional weighing performance with continuous data acquisition up to 50 million points.



Analytical Instruments

Thermal Analysis Excellence

Fast Scanning Calorimeter

- The Fast Scanning Calorimeter (Flash DSC) supports ultra-high heating and cooling rates, enabling rapid thermal transitions analysis.
- It is capable of measuring under oxygen-free (inert) conditions for precise thermal behavior characterization.



High Pressure Differential Scanning Calorimetry

- High Pressure DSC instruments allow precise control of pressure, atmosphere type, and purge gas flow rates during thermal analysis
- The HP DSC 2+ variant uses advanced sensors (FRS 6+ and HSS 9+) to ensure high performance under elevated pressure conditions



Simultaneous Thermal Analyzer (TGA/DSC)

- Simultaneous TGA/DSC instruments measure mass changes (TGA) and heat flow events (DSC) in a single run, allowing direct correlation of thermal and mass transitions.
- The TGA/DSC 3+ model supports modular sensor configurations (SDTA, DTA, DSC) and built-in gas flow control to analyze samples under defined atmospheres.



Thermomechanical Analysis (TMA)

- TMA (Thermomechanical Analysis) quantifies dimensional changes (expansion, contraction, deformation) of a material as a function of temperature.
- METTLER TOLEDO's TMA/SDTA 2+ system features Swiss precision mechanics and supports extended temperature ranges ($-150\text{ }^{\circ}\text{C}$ to $1,600\text{ }^{\circ}\text{C}$) with variable applied forces (e.g. in DLTMA mode).




Analytical Instruments

Laboratory Software Solutions

- The Lab Software suite works to centralize control over laboratory instruments, data, workflows, and user roles.
- LabX is a core platform that manages multiple METTLER TOLEDO lab instruments in a unified software environment.
- LabX supports instrument method downloads, result collection, and audit trail generation for regulatory compliance.
- EasyDirect is a simpler software tool focused on automatic data transfer from instruments to a PC to improve data management.
- The lab software solutions are designed to enhance the performance of laboratory instruments by enabling smarter data handling and workflow orchestration.
- These software products support electronic data management, reducing manual entry and transcription errors in the laboratory.
- Lab Software supports central resource allocation and usage monitoring across lab instruments and workstations.
- The platform also underpins laboratory compliance, providing features like audit trails, versioning, and traceable records.



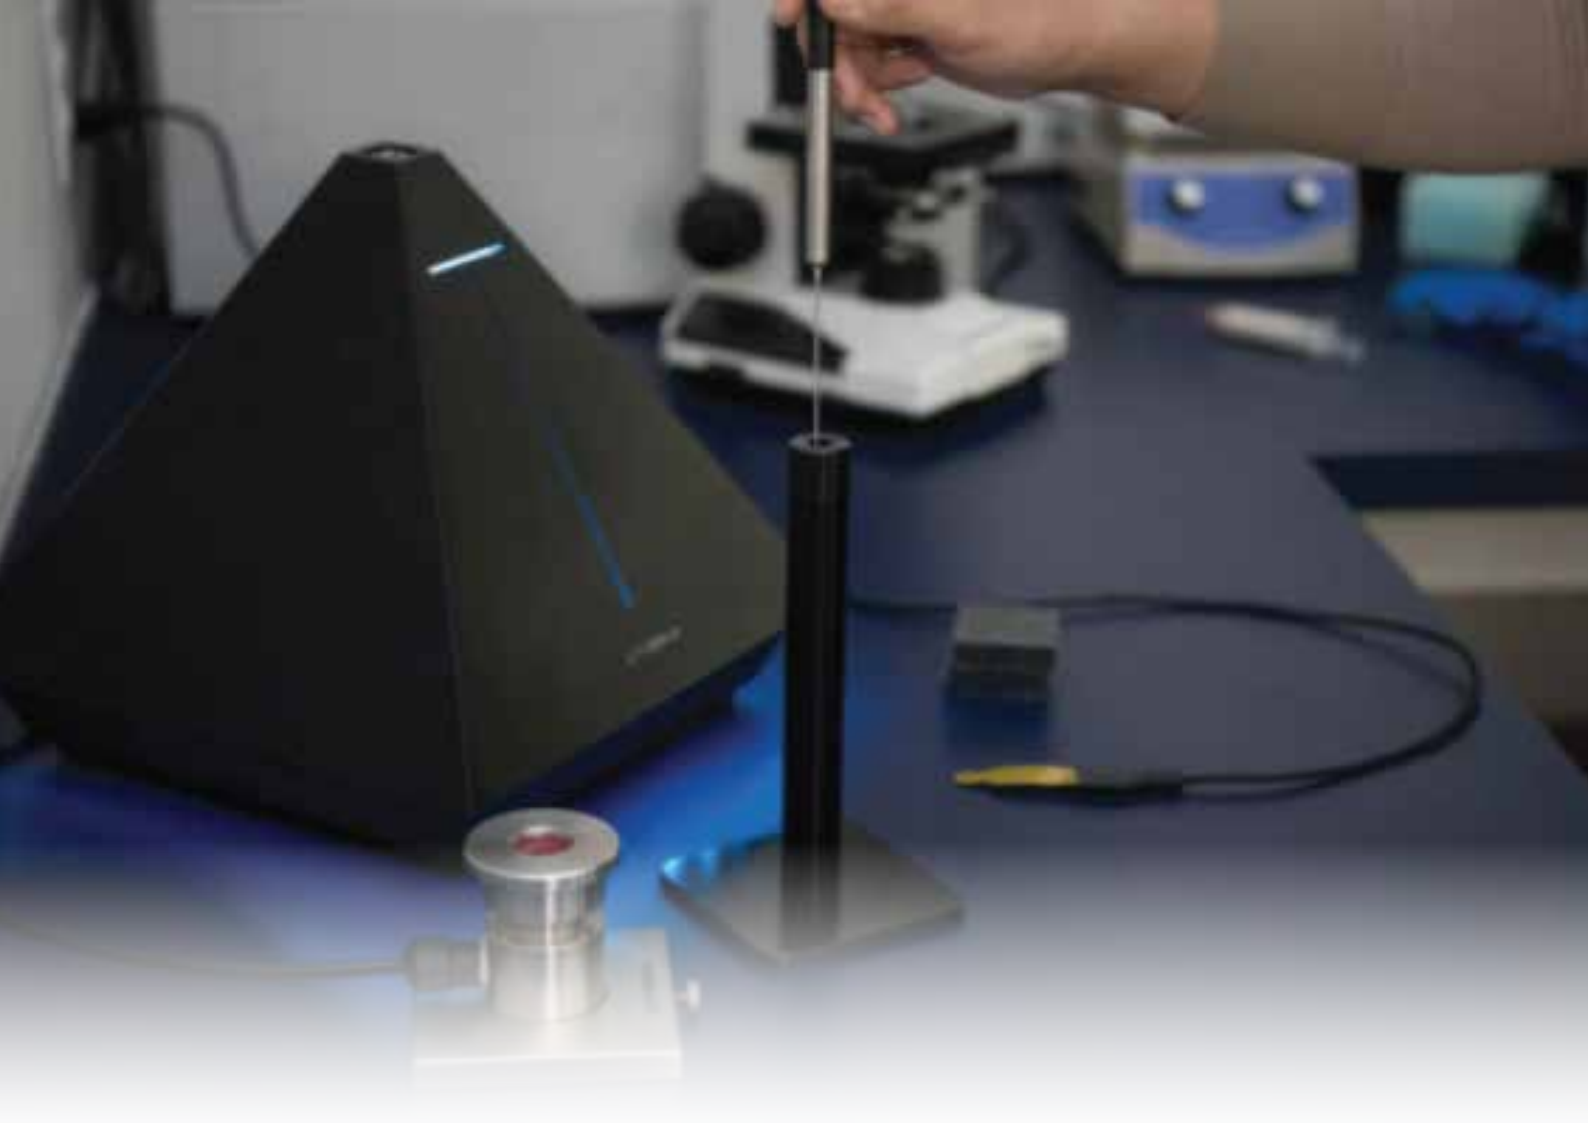

C-THERM
TECHNOLOGIES^{Lt}

Thermal Conductivity

Thermal Conductivity

Trident Thermal Conductivity Instrument

- The Trident instrument supports three transient thermal conductivity measurement methods (MTPS, TLS Needle, and Flex TPS) in a single modular platform.
- Its MTPS sensor is single-sided and provides fast, precise measurements of both thermal conductivity and effusivity with a typical measurement pulse of 1–3 seconds.
- The TLS Needle probe is designed for robust performance with granular, viscous, or paste samples, following ASTM D5334/D5930 standards.
- The Flex TPS configuration uses a double-sided sensor to simultaneously derive thermal conductivity, diffusivity, and specific heat capacity, conforming to ISO 22007-2.
- A Hot Wire (THW) probe is also supported for rapid testing of liquids and powders, operating under the ASTM D7896-19 method.
- Trident supports a wide thermal conductivity measurement range from ~ 0.01 to $500 \text{ W/m}\cdot\text{K}$, covering materials from insulators to metals.
- It includes temperature compensation and a software system that performs data acquisition, analysis, and method control integrated in one interface.
- The system handles a broad temperature operating range from -50°C to $+200^\circ\text{C}$, with optional extension up to 500°C for certain sensors.



A woman with dark hair, wearing a white lab coat and a necklace, is holding three Rainin pipettes in her right hand. The pipettes are white with blue accents and have the Rainin logo on them. The background is white with a faint grid of dots.

RAININ

Pipetting 360 +

Liquid Handling Solutions

Liquid Handling Solutions

Pipettes

Single Channel Pipettes

- Available in both manual and electronic formats with Universal-fit or LTS tip compatibility, designed for ergonomic and durable daily use.
- Deliver precise micro- to milliliter volume transfer, with optimized mechanics for smooth operation and reduced user fatigue.



Multichannel Pipettes

- Provide consistency across 8 or 12 channels, ensuring synchronized volume delivery in plate workflows
- Offered in manual, electronic, and adjustable spacer variants to adapt to varying lab format needs.



High-throughput platforms

- Instruments like the 96-channel semi-automated systems streamline 96-/384-well plate workflows with improved speed and accuracy.
- Designed to combine efficiency and ease of use for repetitive plate-based pipetting without full robotic complexity.



Repeater pipettes

- Manual versions (AutoRep) support dosing ranges from 2 μ L up to 5 mL and allow multiple aliquots per aspiration cycle.
- Electronic types (NanoRep) enable precise, repeat non-contact dispensing down to sub-microliter volumes.



Electronic multichannel adjustable spacer pipettes

- The E4 XLS Adjustable Spacer models support three volume ranges (5-50 μ L, 20-300 μ L, 100-1200 μ L).
- They allow continuous nozzle spacing adjustment to transition between tubes and plate formats efficiently.



Liquid Handling Solutions

Pipette Tips

- Pipette tips are disposable, form-fitting polypropylene tips used to ensure accurate and consistent micro-volume transfers in research workflows.
- They are autoclavable and chemically stable, preserving integrity in diverse solvent and buffer environments.
- Filtered tips are certified free of RNase, DNase, DNA, and pyrogens, and sterilized post packaging to prevent contamination.
- Low-retention tips incorporate superhydrophobic surfaces to reduce sample adherence and improve recovery of viscous or low surface tension liquids.
- Wide-orifice tips minimize shear stress and reduce flow resistance when handling delicate or viscous samples.
- Extended-length tips are designed to reach into deep, narrow vessels, enabling access in tall or narrow labware.
- Large-volume tips (10 mL – 20 mL) with macro FinePoint geometry provide accurate dispensing of bulk liquids.
- Positive displacement syringe or capillary tips suit viscous, volatile, or high-density liquids by eliminating air gap effects.
- ShaftGard 10 µL tips wrap the pipette's ejector and shaft to guard against cross-contamination in critical applications.
- Rainin tips undergo continuous quality control testing to meet rigorous cleanliness and physical specification standards.



Liquid Handling Solutions

Semi-Automated Pipetting Systems

- The high-throughput platform line comprises semi-automated 96-channel pipetting systems tailored for 96- and 384-well workflows.
- The BenchSmart 96 system supports three quick-change pipetting heads covering volumes from 0.5 μ L to 1 mL.
- The MicroPro 96-channel system features "Pipetting Depth Recall" to maintain consistent tip immersion levels across wells.
- BenchSmart's interface offers touchscreen control of aspiration, dispensing, tip loading, and ejection.
- BenchSmart supports multiple pipetting modes including basic, dilute, multi-dispense, reverse, volume sequencing, mixing, and cycle count.
- Its four-plate layout is designed to minimize tip or reservoir swaps, streamlining multi-step protocols.
- The BenchSmart software allows user accounts, password protection, mode presets, and protocol memory for reproducible workflows.
- MicroPro is among the smallest 96-channel pipettors on the market, optimizing use of bench or biosafety cabinet space.
- MicroPro's precision specs include a volume range of 2–20 μ L, with accuracy and precision designed to stay within low percentage error tolerances.
- Pipette tips designed for these systems use Rainin BioClean LTS technology, compatible with semi-automated pipetting performance requirements.



Liquid Handling Solutions

Pipette Management

- Pipette Management includes SmartCheck™, a tool that verifies pipette performance in less than 60 seconds.
- SmartCheck measures dispensed volume with three repeats and provides a pass/fail result against pipette tolerances.
- It works with any pipette brand dispensing between 10 µL and 1,000 µL, including individual channels of multichannel pipettes.
- PipetteX™ software automates pipette tracking, usage monitoring, and data collection for asset management.
- PipetteX is brand-agnostic, supporting pipettes from different manufacturers.
- SmartStand serves as a docking and charging station, keeping pipettes organized and ready.
- The system ensures audit readiness by maintaining detailed logs of usage, verification, and calibration.
- Regular SmartCheck use helps identify out-of-tolerance pipettes before critical experiments.
- PipetteX allows scheduling of service, calibration, and maintenance across large pipette fleets.
- Together, SmartCheck, PipetteX, and SmartStand provide a complete life-cycle management solution for pipettes.





Tescan

Electron & X-ray Microscopy Solutions

Electron & X-ray Microscopy Solutions

Scanning Electron Microscopes (SEM)

Tescan VEGA

- Tungsten filament SEM with no apertures, simplifying user setup and lowering maintenance burden.
- Uses Wide Field Optics™ and 2× SEM navigation to minimize alignment overhead and speed sample observation.
- Integrates EDS directly in the interface, allowing morphology and elemental analysis in a single environment.




Tescan VEGA compact

- Compact analytical SEM with a large chamber capable of accommodating industrial-scale samples under true high vacuum.
- Employs In-Flight Beam Tracing™ for rapid beam optimization and setting of imaging conditions.
- Uses Essence™ software with EDS overlay tools to correlate morphology and composition within a unified interface.



Tescan MIRA

- FEG-SEM (Schottky source) modular platform suited for high-current, high-resolution imaging.
- Supports multiple techniques (EDS, EBSD, CL, STEM, nanoprototyping) via scalable detector integration.
- Utilizes In-Flight Beam Tracing™ and Wide Field Optics™ to accelerate beam setup and navigation.

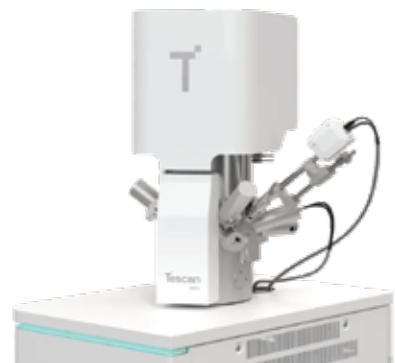

Tescan MIRA XR

- Ultra-high-resolution (UHR) SEM platform combining BrightBeam™ optics, Wide Field Optics™, and Dual Essence™ EDS.
- Offers macro-to-nano automated navigation, beam optimization, and automated column alignment.
- Supports challenging sample types (non-conductive, outgassing) via MultiVac™ and Auto LowVac Aperture.



Electron & X-ray Microscopy Solutions

Scanning Electron Microscopes (SEM)

Tescan CLARA

- Field-free UHR SEM platform optimized for imaging delicate, magnetic, or charging samples with minimal artifacts.
- Incorporates energy-filtered, in-column multi-detector design for simultaneous topography and composition contrast in a single scan.
- Supports modular hardware and open scripting workflows for correlative and in-situ experimentation.



Tescan MAGNA

- Uses TriLens™ immersion optics to maintain sub-nanometer resolution at longer working distances and on tilted surfaces.
- Employs contrast-selective detectors (TriSE™, TriBE™) to produce clear SE/BSE contrast with minimal signal mixing.
- Enables STEM-in-SEM capability, allowing nanoscale characterization without switching instruments.



Tescan TIMA

- Automated mineralogy SEM combining high-throughput SEM-EDS with integrated mineral identification and textural analysis.
- Uses four EDS detectors and spectral summing to detect trace and low-abundance minerals.
- Offers unattended data acquisition, automated classification, and spatial linking of compositional and structural data.



Electron & X-ray Microscopy Solutions

Focused Ion Beam-Scanning Electron Microscopes (FIB-SEM)

Tescan AMBER

- Automated Ga FIB-SEM platform combining BrightBeam™ field-free SEM optics with Orange™ Ga ion beam and full automation of lamella preparation workflows (including lift-out).
- Supports both inverted and planar sample preparation, nanoprototyping, and gentle final polishing (with optional Argonne Gentle Ion Beam for < 200 eV polishing).



Tescan AMBER X

- Universal plasma FIB-SEM combining Mistral™ Xe plasma FIB with BrightBeam™ UHR SEM to handle both bulk volumetric milling and delicate TEM lamella prep.
- Capable of curtaining-free, high throughput milling with Xe while retaining Ga-level precision for sensitive sample prep.
- Facilitates complex multimodal workflows (EDS, EBSD, ToF-SIMS, Raman) in a unified instrument.



Tescan SOLARIS

- Dedicated Ga FIB-SEM configured for fully automated, high-precision TEM sample prep in semiconductor devices
- Incorporates Triglav™ SEM, AutoTEM Pro™ software, and OptiLift™ nanomanipulator for repeatable lamella preparation in planar, inverted or top-down geometries
- Offers AI-driven workflows, precise end-pointing, overnight auto-alignment, and unattended batch processing



Tescan SOLARIS X

- Plasma FIB-SEM platform for high throughput failure analysis and Ga-free sample preparation, combining Mistral™ Xe plasma FIB with UHR SEM imaging
- Provides artifact-free "TRUE X-sectioning" using Rocking Stage cross-sectioning capabilities in heterogeneous stacks and materials



Electron & X-ray Microscopy Solutions

Micro-computed tomography (microCT)

Tescan UniTOM HR

- Achieves sub-600 nm spatial resolution while enabling high-speed, time-resolved 3D (and 4D) imaging in one instrument
- Permits in-situ/multiphysics experiments via flexible stages, environmental ports, and real-time visualization
- Supports automated batch workflows, rapid reconstruction, and macro-to-micro image correlation



Tescan UniTOM XL

- Handles large samples (up to 60 cm diameter, 100 cm height) for non-destructive 3D/4D imaging while preserving internal fine resolution
- Features multiscale zoom, high-flux X-ray source, and in-situ test capability for composite inspection or QA
- Incorporates automation, volume-of-interest scanning, and high throughput detectors for productivity



Tescan DynaTOM

- Gantry-style architecture allows continuous 4D scanning (≈ 7.5 s per rotation at $12.5 \mu\text{m}$ voxel) without moving the sample
- Designed for complex in-situ experiments—fixed sample, moving source/detector to avoid sample disturbance or cabling issues
- Offers high-temporal-resolution reconstructions and integrated 4D visualization workflows



Tescan Spectral CT (Add-on for UniTOM XL)

- Captures full X-ray spectrum before and after interaction to provide non-destructive elemental/chemical contrast
- Enhances discrimination in low contrast materials (e.g. polymers, soft tissues) via multi-energy spectral imaging
- Seamlessly integrates with UniTOM XL, enabling one-click switching and compatibility with existing scanning workflows




Electron & X-ray Microscopy Solutions

4D STEM

Tescan TENSOR

- Dedicated 4D-STEM platform that synchronously acquires diffraction patterns and EDS spectra at each scanned pixel (i.e. analytical 4D-STEM)
- Employs beam precession / precession electron diffraction (PED) to enhance diffraction data quality, improving accuracy in orientation, phase, and strain mapping
- Integrated direct electron detector (hybrid pixel DED) tightly synchronized with beam scanning, beam blanking, and precession to maximize throughput and reduce artifacts
- Maintains a near-UHV environment around the sample area to minimize contamination and preserve diffraction fidelity
- Offers "out-of-the-box" STEM, 4D-STEM, and tomography measurement modes with automated workflows and minimal user alignment burden
- Can perform STEM imaging modes (bright field, annular dark field, HAADF) up to gigapixel scale (≈ 10 Mpx/s), using integrated detectors and automatic alignment
- Enables strain mapping with nanometer resolution and ~ 0.05 % precision, leveraging precession-enhanced diffraction data
- info.tescan.com
- Supports automated sample navigation and ROI selection: begins with a low-magnification overview then zooms and readjusts acquisition parameters seamlessly in the background



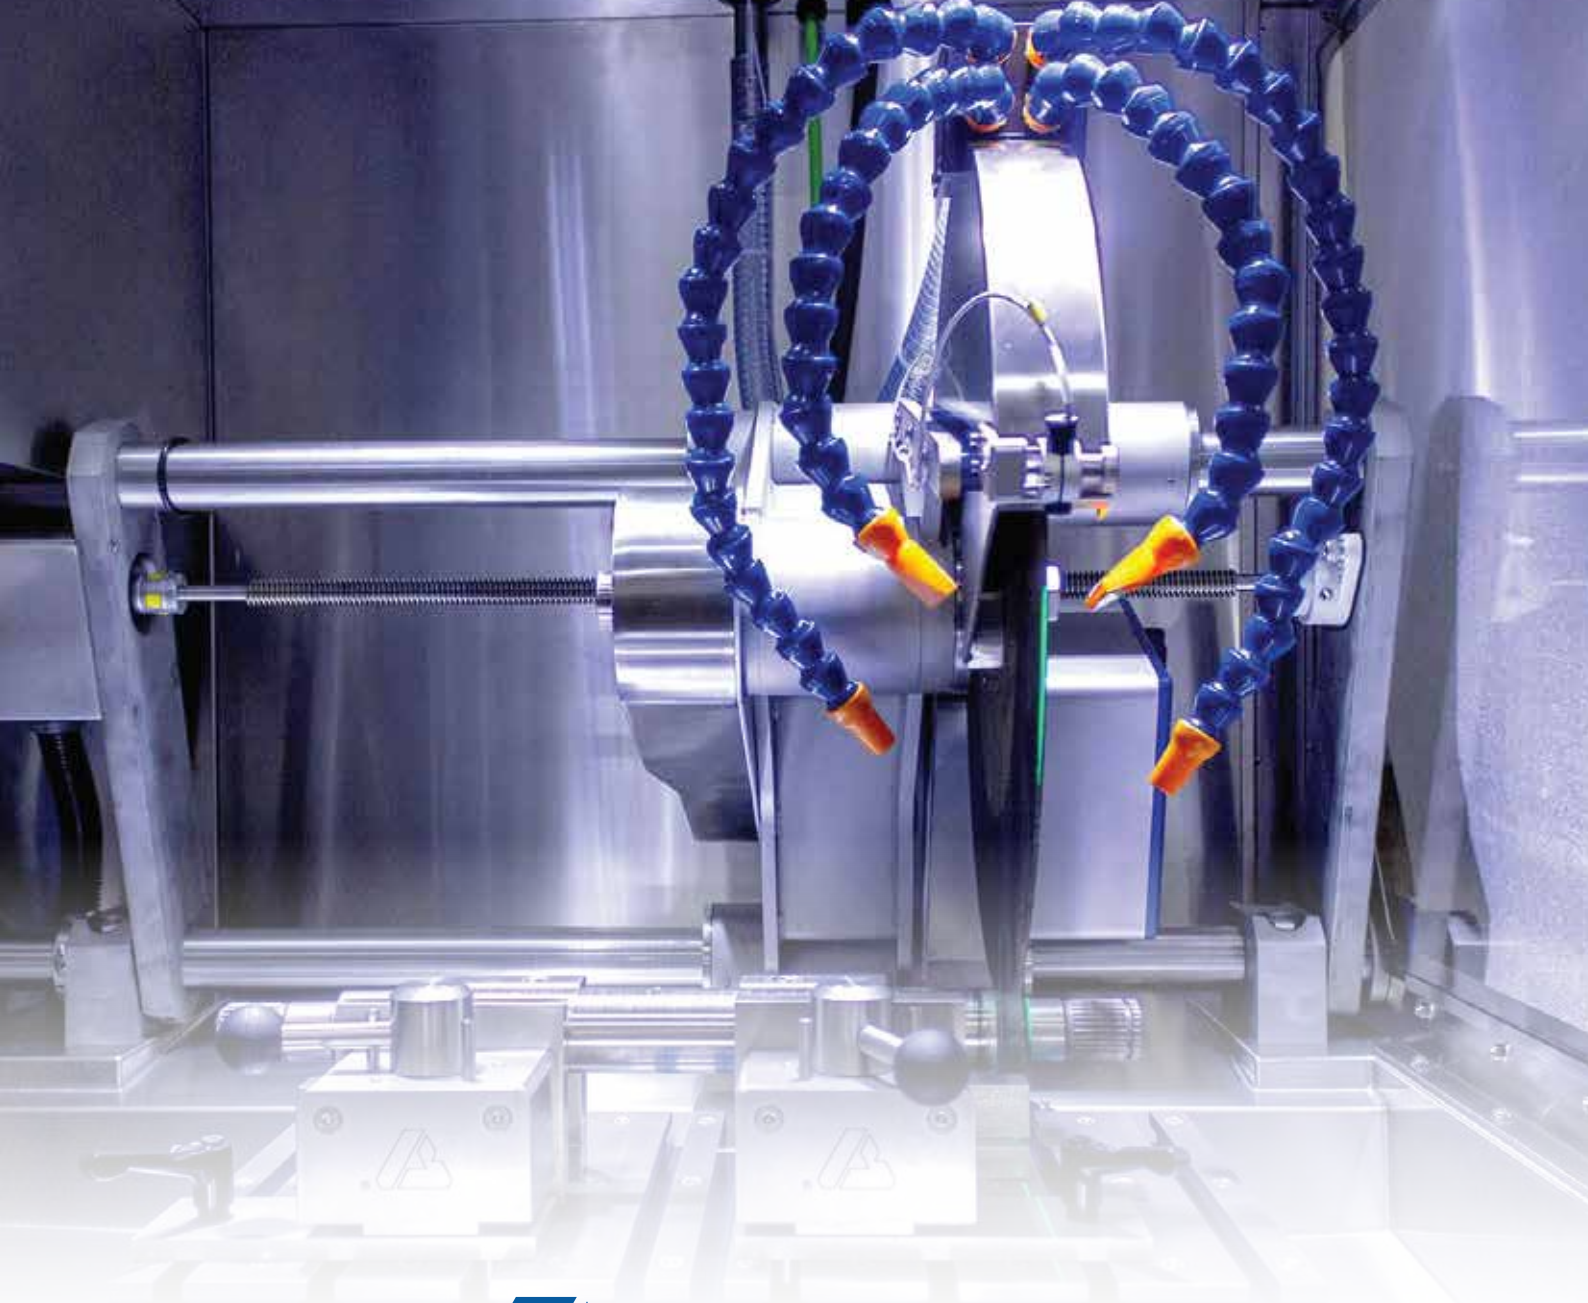

Strong Partner, Reliable Solutions

Metallography Preparation

Metallography Preparation

Sectioning & Cutting

Abrasive Cutters

- Available in manual and automatic configurations, designed to achieve both speed and cut quality with consistent performance.
- Support blades from 9" up to 18" (229 mm to 457 mm) in diameter, available as rubber-bonded or resin-bonded blades to optimize cutting performance.



Precision Cutters

- Employ diamond or CBN (Cubic Boron Nitride) blades sized between 3" and 8" (76 mm to 203 mm) for delicate, high-accuracy sectioning.
- Include both manual (gravity-fed) and automatic (3-axis motion, automatic dressing) machines to match precision and throughput needs.



Sectioning Consumables

- Consumables comprise abrasive and precision cutting blades designed to match the operating cutter type and material being sectioned.
- Provide both water-miscible and oil-based coolants / lubricants to manage heat during cutting and prevent thermal damage to specimens.



Sectioning Accessories

- Include vising / clamping systems tailored for both abrasive and precision cutters to firmly secure samples during sectioning operations.
- For precision machines, accessories include flange sets (aluminum or stainless) with diameters from 1.38 to 5 (35 mm to 127 mm) to support sample mounting.



Metallography Preparation

Mounting

Hot Mounting (Compression Mounting)

- Uses a compression mounting press (e.g. SimpliMet 4000) applying high pressure (70–300 bars / 1000–4400 psi) and heat (operating temperatures ~50 °C to 220 °C) to encapsulate specimens in mounting media with minimal shrinkage while protecting sample edges.
- Supports multiple mold sizes (e.g. 1 to 1.5 inch / 25 to 50 mm) and allows dual-sample cycles (via duplex spacer) to increase throughput without lengthening cycle time.



Cold Mounting (Castable / Epoxy / Acrylic Mounting)

- Employs castable mounting systems (epoxy or acrylic) that cure at ambient or low temperatures, ideal for specimens that are heat- or pressure-sensitive.
- Utilizes vacuum systems (e.g. SimpliVac) to draw out entrapped air and improve infiltration of mounting resin into pores or microstructures, reducing voids and improving mount integrity.



Mounting Consumables

- Includes compression (hot) mounting compounds, epoxy systems, and acrylic resins, each formulated to optimize edge retention, low shrinkage, and specimen encapsulation quality.
- Also consists of release agents, pigments, fillers, support clips, and additives (e.g. conductive fillers) intended to customize mounting behavior, ease mold release, and maintain sample alignment.



Mounting Accessories

- Offers a range of mold hardware such as hard and disposable mounting cups, open ring forms, EPDM molds in sizes 1–2 inch / 25–50 mm, and rectangular molds for various geometries.
- Provides specimen support clips (SamplKlip, support clips), pigments, mixing cups, mounting waxes, and filler additives for orienting specimens and enhancing mount properties.



Metallography Preparation

Grinding & Polishing

Semi-Auto Grinder Polishers

- Automates multi-sample processing to enhance throughput while ensuring uniform sample quality and reproducible results across all preparation stages.
- Supports modular automation with up to three Burst dispensing modules for precise delivery of polishing suspensions and lubricants during operation.



Manual Grinder Polishers

- Designed for single-sample or low-volume processing, with reliable control and platens up to 12" (305 mm) in diameter for large surface areas.
- Available in single or dual platen configurations, enabling flexible use for multi-user environments or sequential preparation steps.



Specialty Grinder Polishers

- Includes vibratory polishers such as VibroMet® 2 for removing micro-deformations and achieving ultra-smooth surfaces ideal for SEM or high-magnification analysis.
- Features compact systems like MiniMet® 1000, designed for precise polishing of delicate specimens in laboratories with limited space or specialized containment areas.



Grinding and Polishing Consumables and Accessories

- Consumables include silicon carbide papers, diamond grinding discs, polishing cloths, diamond suspensions, and fine polishing media such as alumina and colloidal silica down to 0.02 µm.
- Accessories comprise specimen holders, platen systems, Burst dispensing modules for automated suspension control, and EnvironMet recirculating systems for coolant filtration and fluid management.



Metallography Preparation

Etching

Electropolishing and Etching Systems

- The system integrates both electropolishing and etching functionality in a single instrument, allowing streamlined sample preparation workflows.
- Electropolishing mode employs controlled electrochemical dissolution to remove a thin surface layer uniformly, producing a glare-free, deformation-free surface suitable for microstructural analysis.
- Etching mode in the same system applies chemical reagents under controlled conditions to reveal grain boundaries and phase contrasts on the polished surface.
- The design includes automatic cleaning cycles to flush residual electrolytes and etchant reagents, minimizing cross-contamination between processes.
- The working chamber is sized to accept typical metallographic specimen formats, enabling practical throughput of standard sample sizes.
- All fluid reservoirs, sample holders, and wetted parts are constructed from chemically resistant materials to withstand exposure to acidic electrolytes and etchants.
- The user interface allows programmable control over process parameters such as voltage, current, time, and etchant selection to tailor cycles for different materials.
- Safety features include system interlocks, effective sealing, and proper containment to manage handling of acids, electrolytes, and byproducts during operation.
- The instrument is described as suitable for metallographic sample preparation, indicating it is intended for materials science, failure analysis, and microstructural investigation workflows.
- The system is built for demanding environments, emphasizing durability in design and components to support frequent usage.
- A large working space is provided to accommodate multiple or larger specimens simultaneously in the polishing/etching chamber.
- The system's construction and features aim to facilitate efficient process transitions between electropolishing and etching, reducing operator intervention and setup downtime.



Metallography Preparation

Hardness Testing

Vickers Knoop Hardness Testing

- Utilizes high-quality optical systems and a load range from 10 gf up to 50 kgf (in suitable models) to provide precise micro to macro hardness measurements.
- Machines incorporate automatic features like autofocus and auto measurement to streamline testing and reduce operator variability.



Rockwell Hardness Testing

- Models such as the Rockwell 574 and RH2150 support both regular and superficial scales across a broad range of loads, complying with standards like ASTM E18 and ISO 6508.
- Rockwell testers employ a depth-based measurement method (minor + major load cycle) with high precision depth detection to yield fast and repeatable hardness values.



Brinell Hardness Testing

- The Wilson BH3000 is designed for high load ranges (up to 3000 kgf) enabling evaluation of large or hard specimens—such as castings or large diameter parts—under heavy indentation loads.
- The instrument features rugged construction, closed-loop control, and integrated hardness calculations to support reliable and durable Brinell measurement.



Universal Hardness Testing

- Universal testers like the UH4000 series allow a single instrument to perform Vickers, Knoop, Rockwell, and Brinell tests via turret interchangeability and software control.
- These testers are configured to execute multiple hardness methods in one workflow and operate under DiaMet software to reduce complexity and enhance flexibility.



Hardness Test Blocks and Accessories

- Test blocks are manufactured with strict control over chemistry, flatness, parallelism, and surface roughness, and they are calibrated in Buehler's ISO/IEC 17025 lab to ensure traceability and repeatability.
- Accessories include certified indenters, sample holders and anvils, and fixtures such as GP-HDT that facilitate direct transfer from preparation (grinding/polishing) to hardness testing without sample re-handling.




Metallography Preparation

Hardness Testing

DiaMet Software

- DiaMet is optimized for a broad set of hardness scales, including Macro-Vickers, Micro-Vickers, Knoop, Rockwell, Superficial Rockwell, Brinell, and K1c fracture assessments, fully aligned with ISO and ASTM standards.
- The Wilson VH3300 automatic Vickers / Knoop system accommodates a six-position turret with a three-indenter design, covering a load range from 10 gf to 50 kgf.
- The VH1102 / VH1202 microhardness testers provide fine resolution testing in low load ranges (0.01-2 kgf) and support integration with DiaMet for automated measurement.
- The VH1150 macro Vickers tester spans 300 gf to 50 kgf in a single instrument, offering motorized turret load selection and optional high-resolution camera for automated readout.
- The Rockwell line (e.g. Wilson 574, RH2150) supports both regular and superficial Rockwell scales, employing high-precision depth measurement to meet ASTM E18 and ISO 6508 standards.
- The Wilson RH2150 is engineered for high volume labs, with extended vertical capacity (10-inch and 14-inch variants), load cell protection, auto-stop clamping, and USB connectivity for data export.
- The Brinell instrument Wilson BH3000 supports a load range from 62.5 kgf up to 3000 kgf, using a closed-loop control system and robust mechanical design for large part testing.
- The universal hardness testing line (UH4000 series) enables Vickers, Knoop, Rockwell, and Brinell tests in one machine with an 8-position turret, laser targeting, and ring light for precise Brinell measurements.
- Hardness test blocks (Rockwell, Brinell, Vickers, Knoop) are manufactured under strict control of thickness, flatness, parallelism, and surface roughness, and are calibrated in Buehler's ISO/IEC 17025 accredited calibration lab.
- Accessories for hardness testing include ISO/ASTM certified indenters, sample holders and anvils, and fixtures such as the GP-HDT that allow direct transfer of specimens from grinding/polishing to hardness testing without re-mounting.

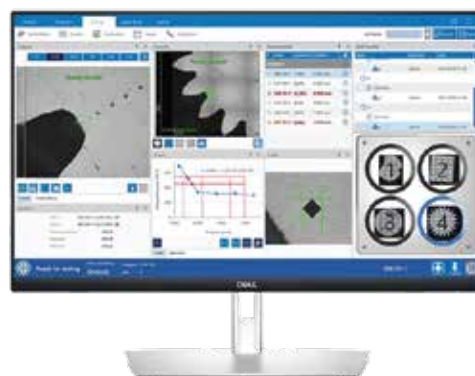



INSTRON

Materials Testing Systems

Materials Testing Systems

Universal Testing Systems

6800 Series Universal Testing Systems

- Delivers force capacity from 0.02 N to 300 kN with load measurement accuracy of $\pm 0.5\%$ of reading down to 1/1000 of the load cell capacity using 2580 Series cells.
- Features such as auto-positioning, specimen protection, increased axial stiffness, collision mitigation, and compatibility with advanced accessories and automation modules.
- Supports expansion to up to 13 channels plus analog I/O and digital I/O, with removable handset controls and optional smart-close air kit for safer grip actuation.



3400 Series Universal Testing Systems

- Covers force range from 0.025 N to 300 kN, achieving $\pm 0.5\%$ accuracy down to 1/250 of load cell capacity (and $\pm 1.0\%$ down to 1/500).
- Designed for routine mechanical testing and quality control, with features such as collision mitigation, safety coaching, and optional smart-close air grip kit.
- Frame styles include single column and table models, offered in extra height variants to support testing of high elongation specimens.



Automation for Universal Testing Systems

- Provides modular or turnkey automation solutions (e.g. AT2, AT3, AT6, CT6, automated carousel, cobot integration) to automate specimen loading, test execution, and data collection.
- Designed to enhance throughput, repeatability, safety, and workflow efficiency, allowing operators to focus on analysis rather than machine operation.
- Automation modules can integrate with existing systems and accessories, supporting multiple test types (tension, compression, flexure, shear) in one workflow.



Materials Testing Systems

Universal Testing Systems

5980 Series Universal Testing Systems

- Rated for force capacity up to 600 kN, with load measurement accuracy of $\pm 0.5\%$ down to 1/1000 of load cell capacity using 2580 Series cells (and $\pm 0.4\%$ at certain ranges with other cells).
- Built for high strength material testing with increased axial stiffness, compatibility with automation and accessories, removable handset, specimen protection, and automatic gain adjustment.



Industrial Series Universal Testing Systems

- Uses hydraulic drive systems to deliver force up to 2000 kN, with testing spaces and frame stiffness suitable for large, high-strength specimens.
- Load measurement accuracy of $\pm 0.5\%$ down to 1/500 of load cell capacity, featuring specimen protection, automatic gain adjustment, removable handset for ergonomic control.
- Select frames (e.g. DX, HDX) provide dual test spaces enabling tension and compression/bending/shear testing without needing fixture changes when switching modes.



Specialty Systems

- Custom solutions engineered for application-specific requirements, such as the Curved Needle Testing System for puncture and bend testing of surgical needles per ASTM F3014.
- Customization includes frame geometry modifications, specialized safety shielding (light curtains, debris shields), high-speed frames, and tailored fixtures to accommodate unique specimen shapes or test protocols.



Materials Testing Systems

Dynamic Testing Systems

ElectroPuls All-Electric Dynamic & Fatigue Test Systems

- All-electric linear motor systems designed for static and dynamic fatigue testing up to 20 kN without the need for hydraulics, oil, or compressed air.
- Provide high-frequency performance suitable for both tensile and fatigue applications using precise digital control and feedback.



General Purpose Hydraulic Fatigue Systems

- Servo-hydraulic test frames designed for static and dynamic testing, including low-cycle and high-cycle fatigue, fracture mechanics, and durability studies.
- Configurable with various actuator sizes, load capacities, and hydraulic power units to meet a wide range of material and component testing needs.



Low Strain Rate 8862 Servo-Electric Systems

- Designed for low strain rate fatigue and static testing where precise control and smooth motion are required.
- Utilizes servo-electric actuation to eliminate the need for hydraulic infrastructure, minimizing maintenance and energy consumption.



High Strain Rate VHS Systems

- Engineered for testing materials at velocities up to 25 m/s to simulate real-world crash, impact, and ballistic events.
- Uses servo-hydraulic actuation with high acceleration and control response for dynamic testing at elevated strain rates.



Axial-Torsion 8850 Systems

- Combines axial and torsional loading in a single servohydraulic frame for simultaneous tension, compression, and torsion fatigue testing.
- Equipped with biaxial load cells and dual-axis digital control to synchronize multi-directional loading profiles.



Materials Testing Systems

Dynamic Testing Systems

ElectroPuls 16-Station Testing Systems

- Multi-station platform allowing up to 16 specimens to be tested in parallel for high-throughput fatigue research.
- Each station features independent control for individual load channels or synchronized test execution.



Biaxial Cruciform Test Systems

- Four-actuator configuration designed for planar biaxial loading of cruciform specimens.
- Enables accurate control of principal strain ratios to evaluate material performance under multiaxial stresses.



High Temperature Fatigue Systems

- Integrates dynamic loading with furnaces or thermal chambers for fatigue and thermo-mechanical testing at elevated temperatures.
- Supports thermal cycling and creep-fatigue interaction studies under controlled environmental conditions.



8800MT Controller / Controller Upgrades

- Digital servo controller providing closed-loop control for up to eight channels in dynamic or static test configurations.
- Offers advanced waveform generation, adaptive tuning, data logging, and limit protection functions.



Materials Testing Systems

Rheology and Impact Testing Systems

Impact Drop Towers & Pendulums

- Designed to evaluate impact resistance of materials and components by applying high-rate loads or shocks to simulate real-world failure modes.
- Provides a critical metric for product safety and lifetime performance under sudden loading conditions.
- Useful in assessing energy absorption, fracture toughness, or brittleness under impact.
- Suitable for testing a wide variety of materials and geometries where sudden load failure is a concern.
- Helps designers and engineers understand how components behave under service or accidental shock loading.



Rheometers and Melt Flow Testers

- Intended to measure rheological properties of thermoplastic materials, capturing how polymer melts behave under shear and flow.
- Enables characterization of melt flow behavior under processing conditions, informing process optimization and material selection.
- Provides data on viscosity, shear response, and flow curves relevant to extrusion, injection molding, or melt processing.
- Supports evaluation of polymer processability by quantifying behavior under temperature and shear rate variations.



HDT & Vicat

- Designed to characterize plastic materials at elevated temperatures by measuring the Heat Deflection Temperature (HDT) and Vicat softening temperature.
- HDT testing determines the point at which a specimen deforms under a specified load as temperature increases.
- Vicat testing identifies the temperature at which a flat indenter penetrates a specified depth under a stated load.
- These thermomechanical tests provide crucial thermal property data for plastics in design and material selection under heat stress.





Materials Testing Instruments

Materials Testing Instruments

Mechanical Testing Solutions

Tribometers

- Multi-configuration systems supporting pin-on-disk, reciprocating, block-on-ring, and fretting setups in one instrument.
- Integrated real-time friction/wear measurement with optional 3D non-contact profilometry and environmental control chambers.



Indentation and Scratch Testers

- Provide micro to nano-scale indentation and scratch testing with precise load and depth control.
- Include 3D imaging for post-test visualization of hardness, modulus, and coating adhesion performance.




Fretting Tester

- Generates controlled micro-amplitude reciprocating motion for fretting wear and fatigue studies.
- Supports adjustable load, frequency, and displacement, with optional environmental enclosures.



3D Optical Microscopes

- Use interferometry, confocal, or focus-variation techniques for non-contact surface characterization.
- Measure nanometer-level roughness and provide full 3D topography for wear volume analysis.

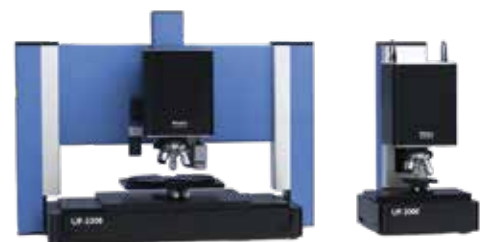

Materials Testing Instruments

Mechanical Testing Solutions

HFRR Tester

- High-Frequency Reciprocating Rig operating at 50 Hz for standardized lubricity evaluation.
- Measures friction coefficient and wear scar diameter under controlled temperature and load.



Vacuum Tribometer

- Performs friction and wear testing in high-vacuum environments relevant to aerospace and semiconductor materials.
- Allows precise control of load, speed, and temperature with multiple test geometries.



Twin Roller Tribometer

- Simulates rolling contact conditions using counter-rotating rollers under controlled loads.
- Evaluates rolling wear, traction, and lubricant behavior across variable speeds and temperatures.



Micropitting Rig

- Replicates gear/bearing micro-pitting through controlled load, torque, and lubrication.
- Tracks surface fatigue progression with friction and surface damage measurement.



Materials Testing Instruments

Mechanical Testing Solutions

Air Jet Erosion Tester

- Delivers controlled abrasive air jet for studying particle-induced erosion.
- Adjusts impact angle, velocity, and particle parameters with 3D quantification of erosion depth/volume.



CMP Tester

- Simulates chemical-mechanical planarization with controlled slurry flow, pressure, and platen speed.
- Measures removal rates, pad wear, and friction under realistic CMP conditions.



High-Pressure Tribometer

- Designed to operate under extremely high contact pressures with full control of load and speed.
- Provides real-time friction/wear measurement and integrates 3D imaging for wear characterization.



Hot Hardness Tester

- Measures hardness at elevated temperatures, maintaining stable force and depth accuracy.
- Evaluates thermal softening, creep, and high-temperature mechanical performance.



Taawon

- 📍 Jordan
- ☎ +962 6 5155 477/8
- 📠 +962 77 748 5466

Diamond Spectrum

- 📍 Saudi Arabia
- ☎ +966 12 6919 740
- 📠 +966 12 61 62 243

Altayf Althahabi - TTSL

- 📍 United Arab Emirates
- ☎ +971 4 514 5813
- 📠 +971 52 575 7156

Diamond Spectrum

- 📍 Bahrain
- ☎ +973 32 225 691
- 📠 +973 17 223 187

